

SuperROD™

Extruded Magnesium Anodes by Galvotec



Anode Rods are available in diameters ranging from 0.500" to 2.562". Each rod has a steel core running lengthwise through its center. These anodes can be easily configured for various Cathodic Protection applications.

Water Heater Anodes are available in several configurations; with welded or unwelded Hex-Head and Anode Outlet Device (AOD). These anodes are typically used for the Cathodic Protection of Water Heaters, Tanks and Boilers. The linked style water heater anodes are typically for replacement applications.

Drive-in Anodes are used for the Cathodic protection of gas service entrance piping and other specialty applications. Also available with steel hex head caps.

SuperLINE™ Ribbon Anodes are used in higher resistivity soils where minimum resistance to earth per unit weight of Anode is important. **SuperLINE™** provides a uniform and efficient current distribution along a pipeline.



Galvotec Alloys, Inc.

ISO 9001 CERTIFIED

SuperROD™


Extruded Magnesium Anode

Product ID	Diameter (inches)	Tolerance (inches)	Core Centering (within-inches)	Core Diameter (inches)	Straightness (inches)	Approximate Weight (lbs/ft)
GA-MG-R500	0.500	-0.020	0.0400	0.135	0.060 in 2 ft	0.180
GA-MG-R625	0.625	-0.020	0.0450	0.135	0.060 in 2 ft	0.216
GA-MG-R675	0.675	-0.020	0.0500	0.135	0.060 in 2 ft	0.300
GA-MG-R700	0.700	-0.020	0.0625	0.135	0.040 in 2 ft	0.324
GA-MG-R750	0.750	-0.020	0.0625	0.135	0.040 in 2 ft	0.372
GA-MG-R800	0.800	-0.020	0.0625	0.135	0.040 in 2 ft	0.420
GA-MG-R840	0.840	-0.020	0.0625	0.135	0.040 in 2 ft	0.456
GA-MG-R900	0.900	-0.020	0.0625	0.135	0.040 in 2 ft	0.516
GA-MG-R1.050	1.050	-0.020	0.0625	0.135	0.040 in 2 ft	0.684
GA-MG-R1.315	1.315	-0.020	0.0625	0.135	0.040 in 2 ft	1.068
GA-MG-R1.561	1.561	+/- 0.016	0.0625	0.188	0.250 in 10 ft	1.500
GA-MG-R2.024	2.024	+/- 0.024	0.1250	0.188	0.250 in 10 ft	2.500
GA-MG-R2.562	2.562	+/- 0.024	0.1250	0.188	0.250 in 10 ft	4.000



Chemical Composition %	Al	Mn	Zn	Ca max	Si max	Cu max	Ni max	Fe max	Other Max% Each	Other Max% Total	Mg
SuperROD™	2.5 3.5	0.20 1.0	0.7 1.3	0.04	0.05	0.01	0.001	0.002	0.01	0.30	Bal.

SuperROD™ Water Heater Anode				Welded screw-on caps			
Anode Diameter (in)	Cap PN	Internal Thread	External Thread	A (in)	B (in)	C (in)	D (in)
0.500	GA-SW1	1/4 - 18 NPT	3/4-14 NPT	1.060	0.81	0.19	0.63
0.675, 0.700, 0.750	GA-SW2	3/8 - 18 NPT	3/4-14 NPT	1.060	0.87	0.19	0.63
0.840, 0.900	GA-SW3	1/2-14 NPT	3/4-14 NPT	1.060	0.87	0.19	0.63
1.050	GA-SW4	3/4-14 NPT	1-11 1/2 NPT	1.310	1.19	0.38	1.00
1.315	GA-SW5	1-11 1/2 NPT	1 1/4-11 1/2 NPT	1.813	1.19	0.44	1.00

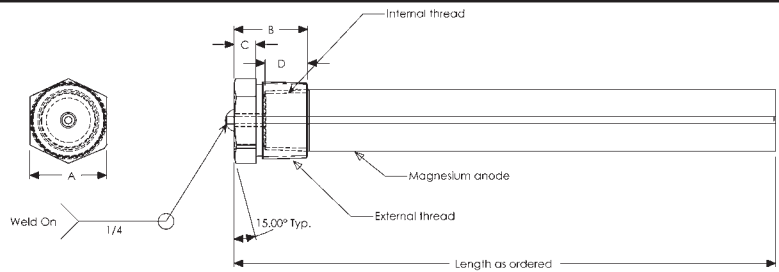

SuperROD™ Drive-In Anode

GA-MG-DR

Product ID	Product Description
GA-MG-0.5DR	0.5 lb. anode with 3 feet lead wire and clamp (0.840" dia. x 13.5 long)
GA-MG-1.0DR	1.0 lb. anode with 3 feet lead wire and clamp (1.315" dia. x 13.5 long)
GA-MG-1.5DR	1.5 lb. anode with 3 feet lead wire and clamp (1.315" dia. x 18 long)



Chemical Composition %	Al	Mn	Zn	Si max	Cu max	Ni max	Fe max	Other Max% Each	Other Max% Total	Mg
SuperLINE™	0.010 max	0.50 - 1.3	-	-	0.02	0.001	0.03	0.05	0.30	Bal.

SuperLINE™

Magnesium Ribbon Anode

Size	3/8" x 3/4" +/-0.015" rectangle, 1/8" radius corners
Core Wire Diameter	0.135"
Centrality Core Wire	<1/16"
Approx. Weight	0.243 lb./ft
Packaging Availability	1,000ft rolls or cut to length
Potential	-1.7V Cu/CuSO4
Capacity	500 Amp hrs/lb min
Typical current in seawater	0.73 amps/ft
Typical current in soil (5,000 ohm cm)	3 milliamps/ft
Typical current in water (15,000 ohm cm)	0.9 milliamps/ft

Agency
CAT MINH
 TECHNOLOGY EQUIPMENT CO., LTD
 SINCE 2000

Director : Mr. Nguyen Thanh Vinh
 Hotline : 0903 1800 99
 Fax : (+84 28) 6258 3348
 Email : vinh@catminh.com

Office : Tedi Bulding, No 15A, Hoang Hoa Tham Street,
 Ward 6, Binh Thanh District, Ho Chi Minh, Viet Nam
www.vietnamdiving.net